

## A973 EasyClip™ A-Series™ 12 Gauge (97mil) End Clip

ClarkDietrich EasyClip A-Series end clips are most commonly used to reinforce connections in knee-wall applications or to reinforce jamb stud connections to the primary frame. These clips are unpunched as the specific application will determine the appropriate number and placement of fasteners.

For allowable loads for multiple connection options, reference the Clip & Connector Catalog or [www.clarkdietrich.com](http://www.clarkdietrich.com) for more information.

### Product Data & Ordering Information:

Material: Structural Grade 50 Type H (ST50H), 50ksi (340 MPa)  
 Coating: G90 (Z275) hot-dipped galvanized coating  
 Thickness: 12 Gauge (97mil)  
           0.1017" Design thickness  
           0.0966" Minimum thickness  
 Dimensions: 3" x 3" x 3" (76.2mm x 76.2mm x 76.2mm)  
 Packaging: 100 pieces per bucket  
 Product Weight: 0.51 lb / piece

### ASTM & Code Standards:

- Sheet steel meets or exceeds requirements of ASTM A1003
- Galvanized coating meets or exceeds requirements of ASTM A653
- SDS & Product Certification Information available at [www.clarkdietrich.com/SupportDocs](http://www.clarkdietrich.com/SupportDocs)


### Alternative Products:

- SwiftClip™ LS-Series Clip
- EasyClip™ D-Series™ Anchor Clip
- EasyClip™ T-Series™ Tall Anchor Clip

### 05.40.00 (Cold-Formed Metal Framing)



- 3" x 3" legs
- Available lengths: 3" and 6"
- Available in 16, 14 & 12 gauge
- A-Series clips are unpunched

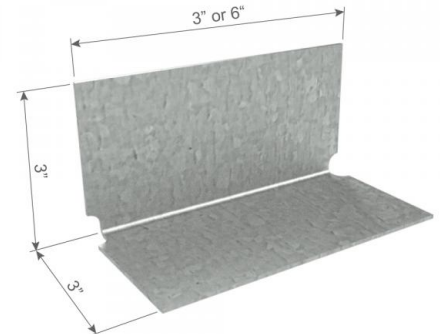

### Sustainability Credits:

For more details and LEED letters contact Technical Services at 888-437-3244 or visit [www.clarkdietrich.com/LEED](http://www.clarkdietrich.com/LEED)

**LEED v4 MR Credit** -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

**LEED 2009 Credit MR 2 & MR 4** -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at ([info@clarkdietrich.com](mailto:info@clarkdietrich.com) / 888-437-3244)

#### Project Information

Name:  
Address:

#### Contractor Information

Name:  
Contact:  
Phone:  
Fax:

#### Architect Information

Name:  
Contact:  
Phone:  
Fax: