

## Vinyl Splayed Bead (VLSB)

### Vinyl Corner Bead

Vinyl 120/135° corner or splayed bead is used to finish off angle interior corners from 120 - 135°. Designed to provide straight, rust-proof, dent-resistant corners, the flexibility of vinyl splay bead allows a flush fit on many unusual outside wallboard intersections. Multiple perforations along the 1-1/4" flanges enhance joint compound bonding. Easy to apply, this vinyl trim can be nailed, stapled or attached with a high tack spray adhesive. Vinyl beads are easily cut with snips, utility knife or scissors without distorting the profile.

#### Product Data & Ordering Information:

Material: 0.028" PVC (Polyvinyl Chloride)  
Dimensions: 1-1/4" leg x 1-1/4" leg

Width	Length	Wt./Ctn.	Pcs./Ctn.
1-1/4" x 1-1/4"	8'	16 lbs	50
1-1/4" x 1-1/4"	10'	20 lbs	50

#### ASTM & Code Standards:

- ASTM C1047 - Standard Specification for Accessories for Gypsum Wallboard and Gypsum Veneer Base
- ASTM D3678 Class 2 materials
- Installation: ASTM C840 & C 841 (interior finishes)
- SDS & Product Certification Information is available at [www.clarkdietrich.com/SupportDocs](http://www.clarkdietrich.com/SupportDocs)


#### Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

### 09.22.00 (Support for Plaster & Gypsum Board)



- Rust proof and dent resistant
- Multiple perforations enhance joint compound bond
- Flexibility allows flush fit on unusual outside corner angles
- Easily cut with snips, utility knives or scissors

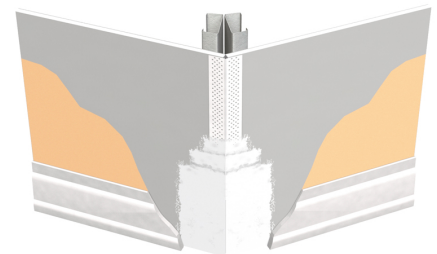

#### Project Information

Name:  
Address:

#### Contractor Information

Name:  
Contact:  
Phone:  
Fax:

#### Architect Information

Name:  
Contact:  
Phone:  
Fax: