

## Vinyl J-Bead (VLJB)

### Vinyl Trims

Vinyl J-Bead provides a finished edge at gypsum board stops around door and window openings and at ceiling intersections. Requires no joint compound. Rigid vinyl is not a thermal transmitter and helps stop condensation where gypsum board terminates at exterior metal surfaces, such as window frames and mullions. Rust proof and dent resistant.

#### Product Data & Ordering Information:

Material: 0.028" PVC (Polyvinyl Chloride)  
Dimensions: 1/2" & 5/8" depths

Width	Length	Wt./Ctn.	Pcs./Ctn.
1/2"	8'	14 lbs	50
1/2"	10'	18 lbs	50
5/8"	8'	16 lbs	50
5/8"	10'	20 lbs	50


#### ASTM & Code Standards:

- ASTM C1047 - Standard Specification for Accessories for Gypsum Wallboard and Gypsum Veneer Base
- ASTM D3678 Class 2 materials
- Installation: ASTM C840 & C841 (Interior Finishes)
- SDS & Product Certification Information is available at [www.clarkdietrich.com/SupportDocs](http://www.clarkdietrich.com/SupportDocs)


#### Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

### 09.22.00 (Support for Plaster & Gypsum Board)

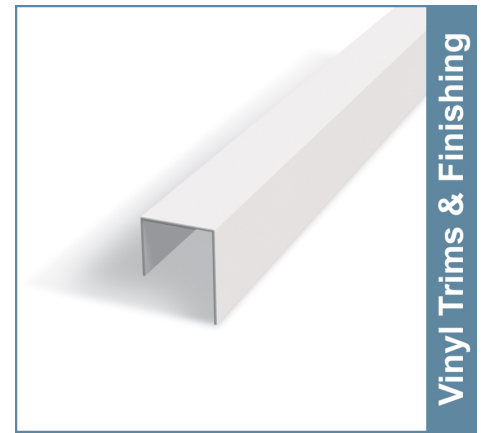

- Rust proof and dent resistant
- Produces finished edges at panel terminations
- Nail or slip on

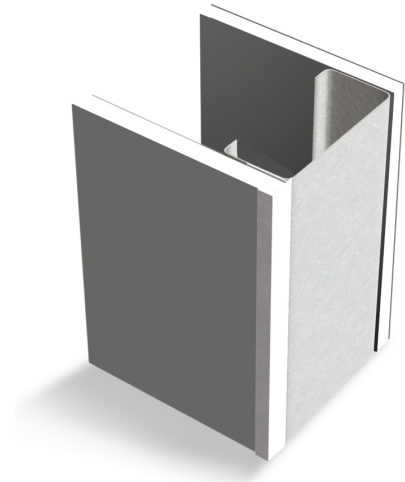

#### Project Information

Name:  
Address:

#### Contractor Information

Name:  
Contact:  
Phone:  
Fax:

#### Architect Information

Name:  
Contact:  
Phone:  
Fax: