

## 1-1/2" x 1-1/2" SwiftClip™ LS Series™ (LS979)


### 12ga (97mil) 9-1/4" Long Support Clip

SwiftClip LS Series support clips are used in multiple construction projects, specifically in conjunction with structural studs and track. The L-shaped clips fit between the stud flanges, so that shorter length clips do not need to be ordered. These labor time-savers include prepunched holes for quicker screw attachments, and are punched to accommodate for CRC lateral bracing connections.

For allowable loads for multiple connection options, reference the Clip & Connector Catalog or [www.clarkdietrich.com/SwiftClip](http://www.clarkdietrich.com/SwiftClip) for more information.

#### Product Data & Ordering Information:

|                        |   |
|------------------------|---|
| <b>Material:</b>       | Structural Grade 50 Type H (ST50H), 50ksi (340 MPa)                   |
| <b>Coating:</b>        | G90 (Z275) hot-dipped galvanized coating                              |
| <b>Thickness:</b>      | 12ga (97mil)<br>0.1017" Design thickness<br>0.0966" Minimum thickness |
| <b>Dimensions:</b>     | 1-1/2" x 1-1/2" x 9-1/4" (38.1mm x 38.1mm x 235mm)                    |
| <b>Packaging:</b>      | 50 pieces per bucket  |
| <b>Product Weight:</b> | 0.76 lb / piece   |

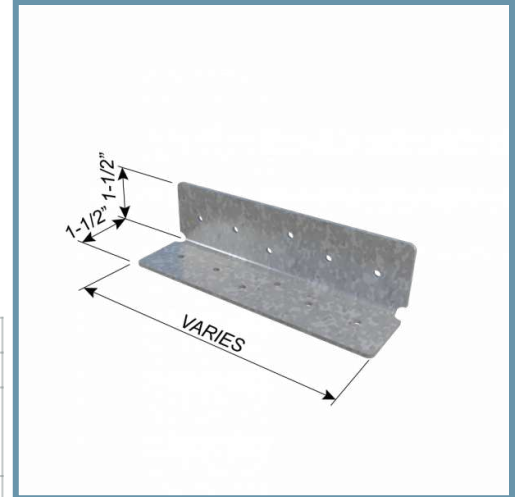

- Lengths Available: 3-1/4", 5-1/2", 7-1/4", 9-1/4", 11-1/4" & 13-1/4"
- Available in 16, 14 & 12 gauge
- Pre-punched for faster and more accurate fastener attachment

#### Code Approvals & Performance Standards


- [ASTM A653](#) Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
- [ASTM A1003](#) Standard Specification for Steel Sheet, Carbon, Metallic- and Nonmetallic-Coated for Cold-Formed Framing Members
- [SDS For ASTM A1003 Steel Framing Products](#) For Interior Framing, Exterior Framing and Clips/Accessories

#### Alternative Products:


- [FastBridge™ Clip](#)
- [EasyClip™ Support Clips](#)

**Sustainability Credits** For more details and LEED letters contact Technical Services at 888-437-3244 or visit [clarkdietrich.com/LEED](http://clarkdietrich.com/LEED).


- **LEED v4.1 MR Credit:** Environmental Product Declarations: EPD (1 point) - Sourcing of Raw Materials (up to 2 points) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points)
- **LEED v4 MR Credit:** Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

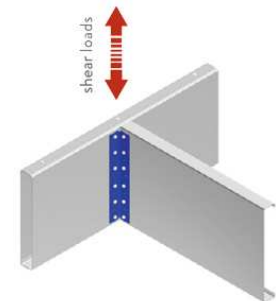

Joist-to-Joist Connections

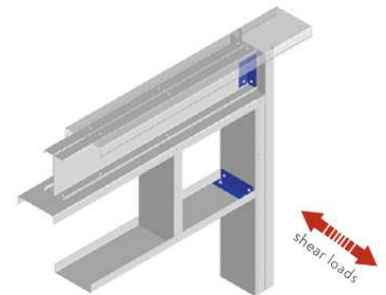

Head-to-Jamb Connections

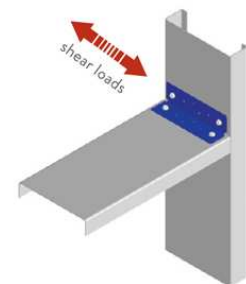

Sill-to-Jamb Connections