

Paper-Faced Inside Splayed Corner Bead (CD2-O)

Paper-Faced Beads & Trims

Off-angle tape-on 120/135° inside or reverse splayed bead is used to achieve a crisp, clean, straight finished inside off-angle drywall finish. This bead can be used for inside corner angles between 120° and 135°. As with all tape-on beads, off-angle bead is applied using joint compound. No mechanical fasteners are required.

Product Data & Ordering Information

Material: 0.0125" min. thickness, galvanized coating

Dimensions: See table below - 50 pieces/carton


Product Code	Style	A	B	C	D	Wt./Ctn.
CD2-O	Off-Angle	5/8"	5/8"	5/8"	5/8"	45 lbs

Code Approvals & Performance Standards

- [ASTM C1047](#) Standard Specification for Accessories for Gypsum Wallboard and Gypsum Veneer Base
- [SDS For ASTM A653 Steel Finishing Products](#) For Interior Finishing and Exterior Finishing

Storage

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

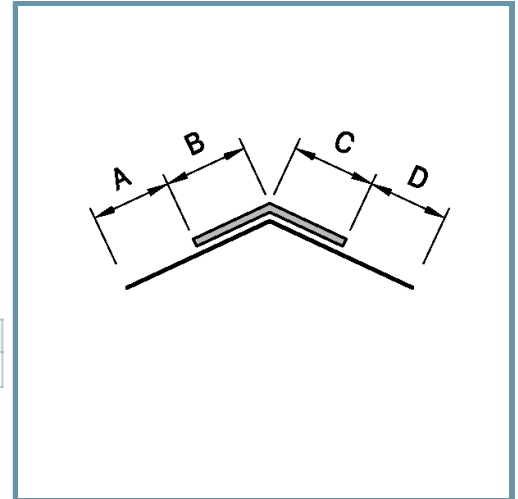

- Substantially reduces joint compound consumption and eliminates one finish coat
- Does not require mechanical fastening (no nails, staples, screws or crimps)
- Superior adhesion, bonding and paintability
- U.S. Patent Nos. 5,613,335 and 5,836,122

