

**Standard Wall, Chase Wall**
**09.22.16 (Non-Structural Metal Framing)**
**362PDT125-15 (50ksi, G40EQ)**
**3-5/8" ProTRAK® 25 (15mil) Drywall Track with PDT125 (1-1/4") legs**
**Coating:** G40EQ

**Color Code:** None

**Geometric Properties**
**Web depth:** 3.625 in

**Design Thickness:** 0.0158 in

**Leg width:** 1.250 in

**Min. steel thickness:** 0.0150 in

**Yield strength, Fy:** 50 ksi

**Gross Section Properties of Full Section, Strong Axis**

Cross sectional area (A)	0.097 in <sup>2</sup>
Member weight per foot of length	0.329 lb/ft
Moment of inertia (Ix)	0.196 in <sup>4</sup>
Radius of gyration (Rx)	1.425 in
Gross moment of inertia (Iy)	0.014 in <sup>4</sup>
Gross radius of gyration (Ry)	0.381 in

**Effective Section Properties, Strong Axis**

Effective Area (Ae)	0.021 in <sup>2</sup>
Moment of inertia for deflection (Ixe)	0.125 in <sup>4</sup>
Section modulus (Sxe)	0.035 in <sup>3</sup>
Allowable bending moment (Ma)	1,059 in-lbs
Allowable shear force in web (Vag)	98 lb


**Torsional Properties**

St. Venant torsional constant (J x 1000)	0.0081 in <sup>4</sup>
Warping constant (Cw)	0.034 in <sup>6</sup>
Distance from shear center to neutral axis (Xo)	-0.668 in
Radii of gyration (Ro)	1.619 in
Torsional flexural constant (Beta)	0.830

- Effective properties incorporate the strength increase from the cold work of forming as applicable per AISI A3.3.2 of AISI S100-16 (2020) w/S2-20.
- Tabulated gross properties, including torsional properties, are based on full-unreduced cross section of the tracks.
- For deflection calculations, use the effective moment of inertia.
- Allowable moment includes cold work of forming.
- Allowable moment is taken as the lowest value based on local or distortional buckling. Distortional buckling strength is based on a k-phi = 0.
- Web depth for track sections is equal to the nominal height plus two times the design thickness plus the bend radius. Hems on nonstructural track sections are ignored.

**Code Approvals & Performance Standards**

- **AISI S100-16 (2020) w/S2-20** North American Specification for the Design of Cold-Formed Steel Structural Members
- **AISI S220-20** North American Standard for Cold-Formed Steel Framing - Nonstructural Members
  - (Compliant to ASTM C645, but IBC replaced with AISI S220 in IBC 2015)
  - Section A3 Material - Chemical & mechanical requirements (Referencing ASTM A1003/A1003M)
  - Section A4 Corrosion Protection (Referencing ASTM A653/A653M)
  - Section A5 Products - Thickness, shapes, tolerances, identification
  - Section C Installation - (Referencing ASTM C754)
- **AISI S202-20** Code of Standard Practice for Cold-Formed Steel Structural Framing
  - Section F3 Delivery, Handling and Storage of Materials
- **ASTM E72** Standard Test Methods of Conducting Strength Tests of Panels for Building Construction
- **ASTM E90** Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements
- **ASTM E119** Standard Test Methods for Fire Tests of Building Construction and Materials
- **IBC 2021** International Building Code
- **Intertek CCRR-0207** Non-Structural Metal Framing
- **LA RR #26019** City of Los Angeles ProSTUD Research Report
- **NYC OTRC** ProSTUD Approval Letter
- **UL Designs 263** "Fire Tests of Building Construction and Materials"
- **UL File Number R26512** Full list of ProSTUD and ProTRAK UL design assemblies
- **SDS For ASTM A1003 Steel Framing Products** For Interior Framing, Exterior Framing and Clips/Accessories

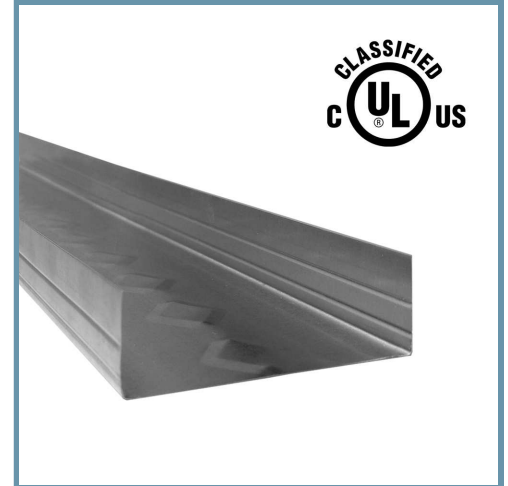

- Embossments in web are only placed on sections 2-1/2" and wider.
- U.S. Patent No. 9,010,070

**Sustainability Credits** For more details and LEED letters contact Technical Services at 888-437-3244 or visit [clarkdietrich.com/LEED](http://clarkdietrich.com/LEED).

- **LEED v4.1 MR Credit:** Environmental Product Declarations: EPD (1 point) - Sourcing of Raw Materials (up to 2 points) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points)
- **LEED v4 MR Credit:** Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).