

Sloped Starter Strip with Drip

Heavy-duty, base support starter strips and perimeter casing bead with drip legs

Sloped design with weep holes in the front provides drainage away from the substrate. The drip legs move moisture away from openings and foundation walls. Perforated flanges allow the base coat mixture to easily flow through and bond to the substrate. Includes the ClarkDietrich Keylock™ Splice for connecting multiple sections and to assist in their alignment. Caulk all intersections, butt joints, ends, and corners at the time of installation.

Product Data & Ordering Information:

Product Code	Finish Thickness	Insulation Thickness (A)	Perforated Flange (B)	Back Flange (C)	PCS/Box
CBS75-332SDWF	3/32"	3/4"	5/8"	2-1/4"	30
CBS100-332SDWF	3/32"	1"	5/8"	2-1/4"	25
CBS125-332SDWF	3/32"	1-1/4"	5/8"	2-1/4"	20
CBS150-332SDWF	3/32"	1-1/2"	5/8"	2-1/4"	20
CBS175-332SDWF	3/32"	1-3/4"	5/8"	2-1/4"	15
CBS200-332SDWF	3/32"	2"	5/8"	2-1/4"	15
CBS225-332SDWF	3/32"	2-1/4"	5/8"	2-1/4"	15


U.S. Patent Number 5,970671 and 6,134,847

Code Approvals & Performance Standards

- [ASTM C1861](#) Standard Specification for Lathing and Furring Accessories, and Fasteners, for Interior and Exterior Portland Cement-Based Plaster
- [ASTM D1784](#) Standard Classification System and Basis for Specification for Rigid Poly(Vinyl Chloride) (PVC) Compounds and Chlorinated Poly(Vinyl Chloride) (CPVC) Compounds
- [ASTM D4216](#) Standard Specification for Rigid Poly(Vinyl Chloride) (PVC) and Related PVC and Chlorinated Poly(Vinyl Chloride) (CPVC) Building Products Compounds
- [ASTM E2110](#) Standard Terminology for Exterior Insulation and Finish Systems (EIFS)
- [ASTM E2511](#) Standard Guide for Detailing of EIFS-Clad Barrier and Drainage Wall Assemblies
- [ASTM E2568](#) Standard Specification for PB Exterior Insulation and Finish Systems
- [SDS Vinyl Corp](#) PVC Compounds

Storage

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

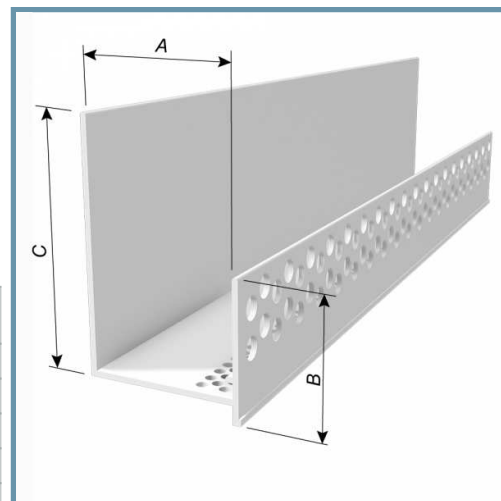

- Available for insulation boards of 3/4", 1" 1-1/4", 1-1/2", 1-3/4", 2" 2-1/4", 2-1/2", 2-3/4", 3", 3-1/4", 3-1/2", 3-3/4" or 4" thickness