

Soffit Vent Control Joint Combination

Continuous, one-piece, combination design like a control joint

Allows movement of the plaster with a vent area that has a perforated flange to assist with embedment.

Product Data & Ordering Information:

Product code	Ground	Reveal Width	Overall Width	Vent Area per LF	Pcs./Box
1538R-200V	3/8"	2"	5"	8 sq. in	20
1550R-200V	1/2"	2"	5"	8 sq. in	18
1558R-200V	5/8"	2"	5"	8 sq. in	18
1575R-200V	3/4"	2"	5"	8 sq. in	15
1578R-200V	7/8"	2"	5"	8 sq. in	12
15100R-200V	1"	2"	5"	8 sq. in	12


Colors available: Standard color White or Tan, Brown, Gray and Black. Call for pricing.

Code Approvals & Performance Standards

- [ASTM C926](#) Standard Specification for Application of Portland Cement - Based Plaster
- [ASTM C1063](#) Standard Specification for Installation of Lathing and Furring to Receive Interior and Exterior Portland Cement-Based Plaster
- [ASTM C1861](#) Standard Specification for Lathing and Furring Accessories, and Fasteners, for Interior and Exterior Portland Cement-Based Plaster
- [ASTM D1784](#) Standard Classification System and Basis for Specification for Rigid Poly(Vinyl Chloride) (PVC) Compounds and Chlorinated Poly(Vinyl Chloride) (CPVC) Compounds
- [ASTM D4216](#) Standard Specification for Rigid Poly(Vinyl Chloride) (PVC) and Related PVC and Chlorinated Poly(Vinyl Chloride) (CPVC) Building Products Compounds
- [SDS Vinyl Corp](#) PVC Compounds

Storage

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

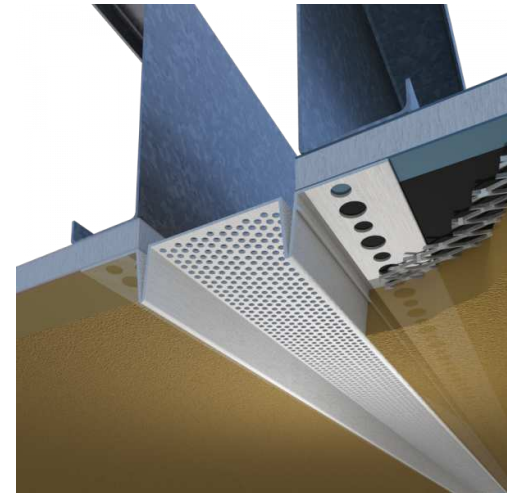

- Available in 2", 3" and 4" reveal widths